


MODEL 219 15 TON AXLE JACK

JACK INCLUDES:

- Cylinder Assembly includes Bronze upper and lower Bearings for longer service life
- Hard Chrome Plated Cylinder and Plunger Bores
- Extension screw and hand pump parts are plated to resist corrosion
- Manual Hand Pump
- Skydrol Resistant Paint (safety yellow)
- Factory Proof Load @ 150% of rated capacity
- 1 Year Warranty
- Fully Enclosed Shipping Container

Model 219 is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

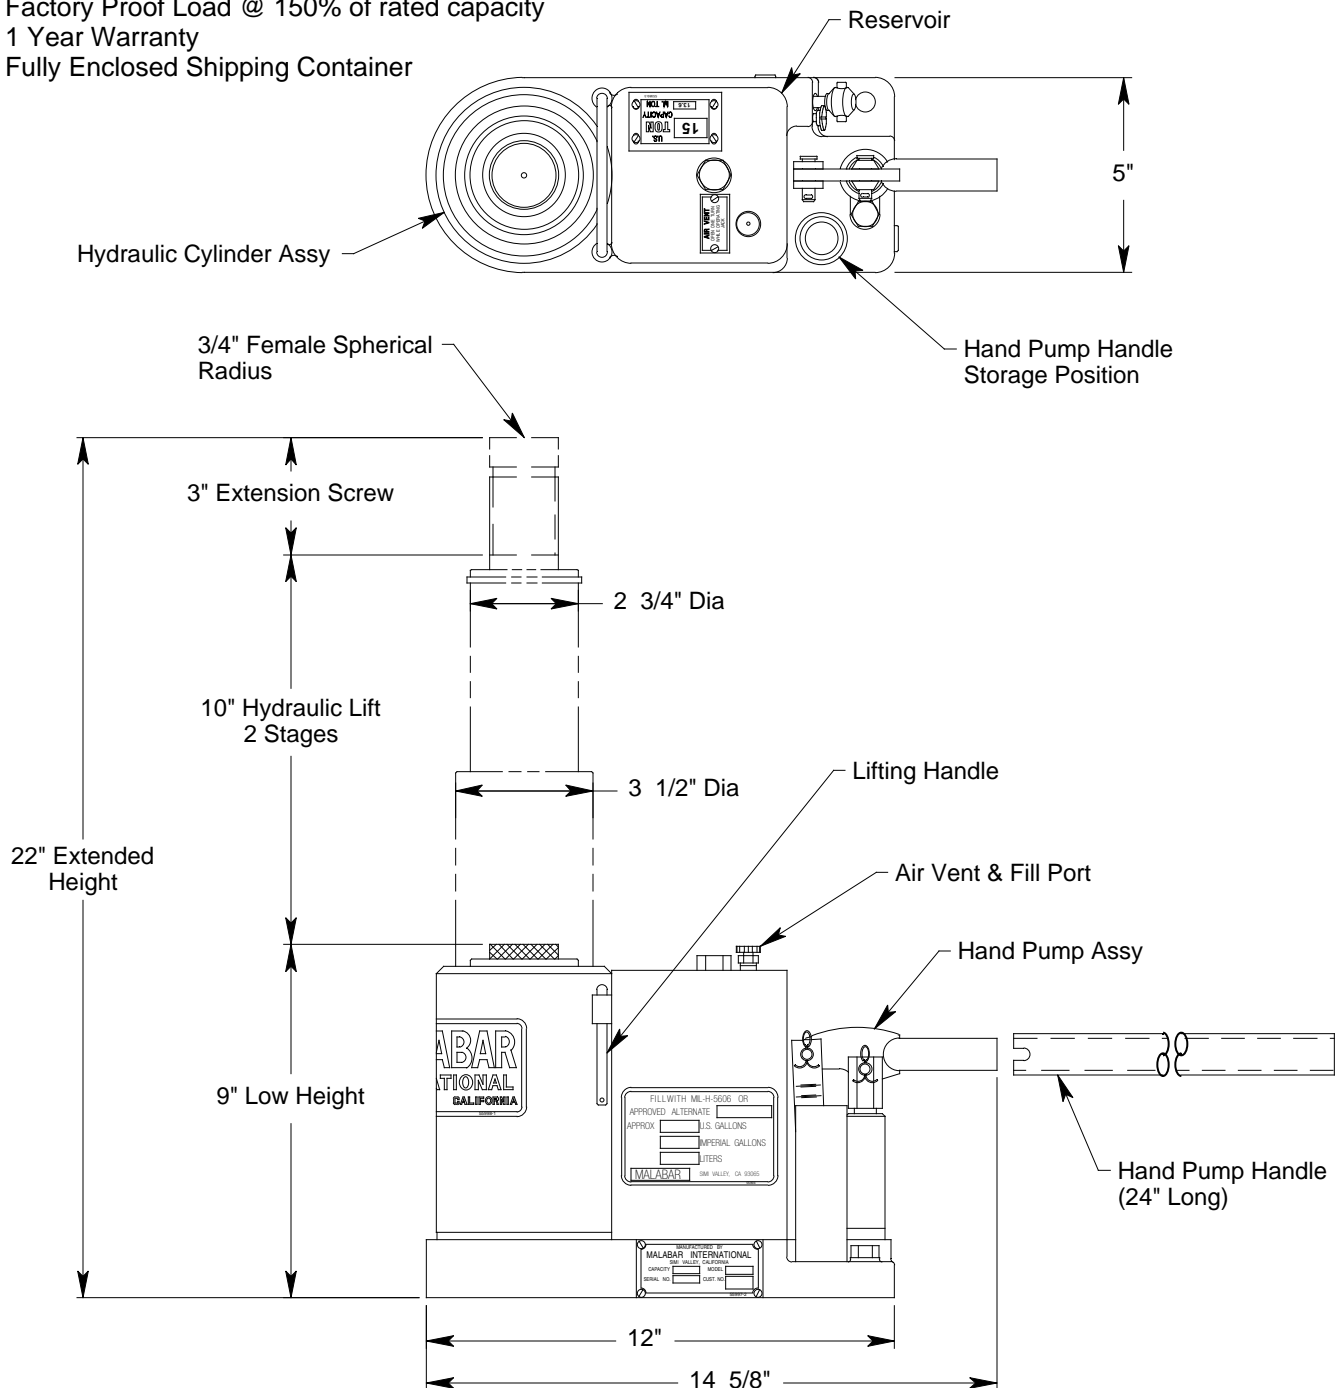

See Reverse Side for Specifications, Options, Aircraft Applications & Shipping Data

MODEL 219 15 TON AXLE JACK

SPECIFICATIONS

Rated Capacity: 15 tons (13.6 m. tons)
 Side Load: 15% of vertical load
 Low Height: 9 inches (229 mm)
 Hydraulic Lift: 10 inches (254 mm)
 Extension Screw: 3 inches (76 mm)
 Total Extended Height: 22 inches (559 mm)
 Oil Pressure at Rated Capacity: 4320 psig (304 kg/sq cm)
 Safety Pop-off Valve set at: 16.5 tons (15.0 m. tons)
 Proof Load: 22.5 tons (20.4 m. tons)
 Reservoir Capacity: 0.5 gallons (1.9 liters)
 Hydraulic Fluid: MIL-H-5606 or equivalent
 Approximate Jack Net Weight: 50 lbs (23 kg)

MODEL 219 TYPICAL AIRCRAFT APPLICATIONS

Nose Landing Gear	Main Landing Gear
A319, A320, A321, B727, GI, GII, GIII, GIV, GV, GVI, GVII	GI, GII, GIII, GIV, GV, GVI, GVII

OPTIONAL EQUIPMENT CODES: (Specify at time of order)
 SPC: Special Paint Color (yellow is standard)
 219PK: Repair Kit

SHIPPING DATA

NOTE: Model 219 jack is shipped in a fully enclosed shipping container.

Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
26 (660)	9 (229)	18 (457)	75 (34)