


MODEL 649A 10 TON AXLE JACK

JACK INCLUDES:

- Hard Chrome Plated Cylinder and Plunger Bores
- Extension screw and hand pump parts are plated to resist corrosion
- Manual Hand Pump
- Skydrol Resistant Paint (safety yellow)
- Factory Proof Load @ 150% of rated capacity
- 1 Year Warranty
- Fully Enclosed Shipping Container

Model 649A is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

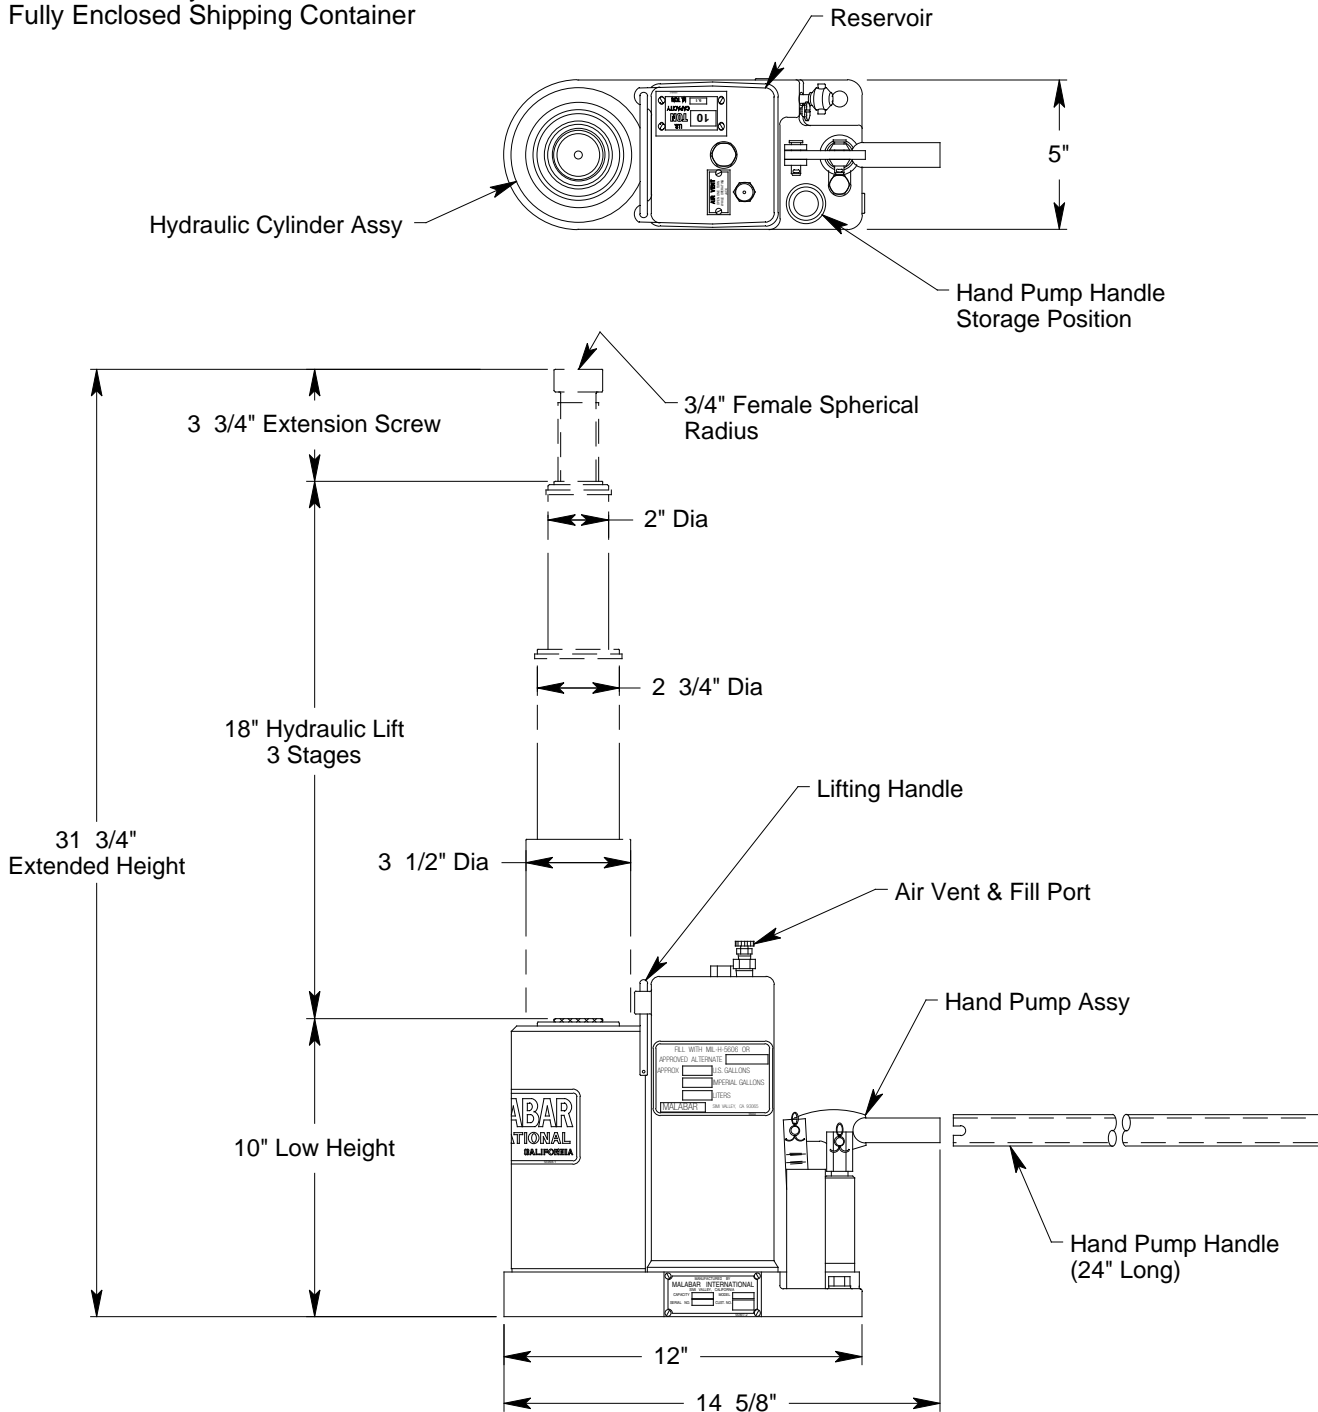

See Reverse Side for Specifications, Options, Aircraft Applications & Shipping Data

MODEL 649A 10 TON AXLE JACK

SPECIFICATIONS

Rated Capacity: 10 tons (9.1 m. tons)
 Side Load: 15% of vertical load
 Low Height: 10 inches (254 mm)
 Hydraulic Lift: 18 inches (457 mm)
 Extension Screw: 3.75 inches (95 mm)
 Total Extended Height: 31.75 inches (806 mm)
 Oil Pressure at Rated Capacity: 5140 psig (361 kg/sq cm)
 Safety Pop-off Valve set at: 11 tons (10.0 m. tons)
 Proof Load: 15 tons (13.6 m. tons)
 Reservoir Capacity: 0.7 gallons (2.6 liters)
 Hydraulic Fluid: MIL-H-5606 or equivalent
 Approximate Jack Net Weight: 60 lbs (27 kg)

MODEL 649A TYPICAL AIRCRAFT APPLICATIONS

Landing Gear

OPTIONAL EQUIPMENT CODES: (Specify at time of order)

SPC: Special Paint Color (yellow is standard)

649APK: Repair Kit

SHIPPING DATA

NOTE: Model 649A jack is shipped in a fully enclosed shipping container.

Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
26 (660)	12 (305)	16 (406)	85 (39)