


MODEL 8693A 12 TON AXLE JACK

JACK INCLUDES:

- Hard Chrome Plated Cylinder and Plunger Bores
- Extension screw and hand pump parts are plated to resist corrosion
- Manual Hand Pump
- Skydrol Resistant Paint (safety yellow)
- Factory Proof Load @ 150% of rated capacity
- 1 Year Warranty
- Fully Enclosed Shipping Container

Model 8693A is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

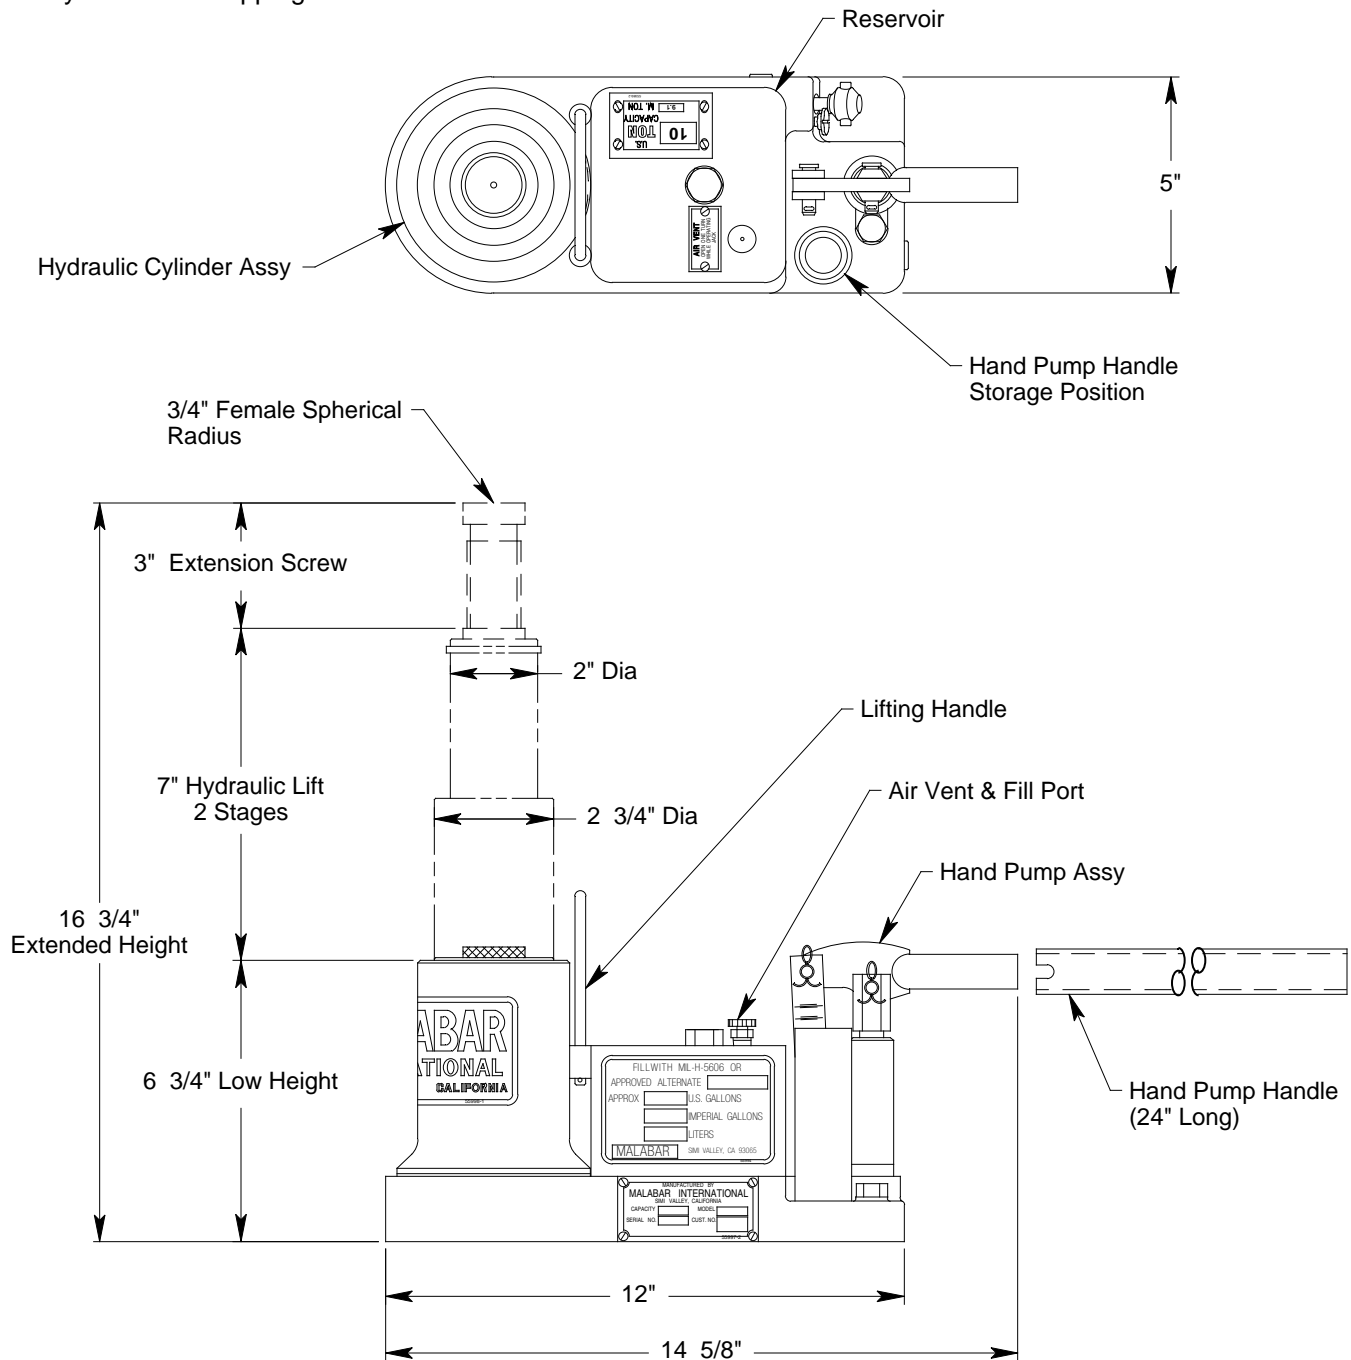

See Reverse Side for Specifications, Options, Aircraft Applications & Shipping Data

MODEL 8693A 12 TON AXLE JACK

SPECIFICATIONS

Rated Capacity: 12 tons (10.9 m. tons)
 Side Load: 15% of vertical load
 Low Height: 6.75 inches (171 mm)
 Hydraulic Lift: 7 inches (178 mm)
 Extension Screw: 3 inches (76 mm)
 Total Extended Height: 16.75 inches (425 mm)
 Oil Pressure at Rated Capacity: 6170 psig (434 kg/sq cm)
 Safety Pop-off Valve set at: 13.2 tons (12.0 m. tons)
 Proof Load: 18 tons (16.3 m. tons)
 Reservoir Capacity: 0.2 gallons (0.8 liters)
 Hydraulic Fluid: MIL-H-5606 or equivalent
 Approximate Jack Net Weight: 36 lbs (16 kg)

MODEL 8693A TYPICAL AIRCRAFT APPLICATIONS

Nose Landing Gear	Main Landing Gear
601, 602, B737, DC9, MD80, MD90	601, 602

OPTIONAL EQUIPMENT CODES: (Specify at time of order)

SPC: Special Paint Color (yellow is standard)
 8693APK: Repair Kit

SHIPPING DATA

NOTE: Model 8693A jack is shipped in a fully enclosed shipping container.

Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
26 (660)	9 (229)	18 (457)	56 (25)