

MODEL 8850 40 TON FIXED HEIGHT TRIPOD JACK


JACK INCLUDES:

- Manual Hand Pump with high, medium and low pressure operating positions
- Heavy Duty Tow Handle and Swivel Casters with Swivel Locks for improved towing
- Hydraulic "Thermal" Relief Valve for added protection and safety in the event of internal fluid expansion due to temperature
- Secondary Cylinder Seal for protection against contaminants and to prolong life of primary seal
- Rain Hat (covers jack upper head)
- Hard Chrome Plated Cylinder Bore
- All unpainted parts are plated to resist corrosion
- Skydrol Resistant Paint (safety yellow)
- Factory Proof Load @ 150% of rated capacity
- 3 Year Warranty
- Shipping Skid

STANDARD OPTIONS:

- Air Operated Hydraulic Pump
- Load Gauge for load indication (reads tons/psig)
- Adjustable Swivel Feet with Level for leveling jack
- Platform Mounted Operating Controls allow one person to position locknut while controlling lifting and lowering operations
- Ladder/platform

Model 8850 is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

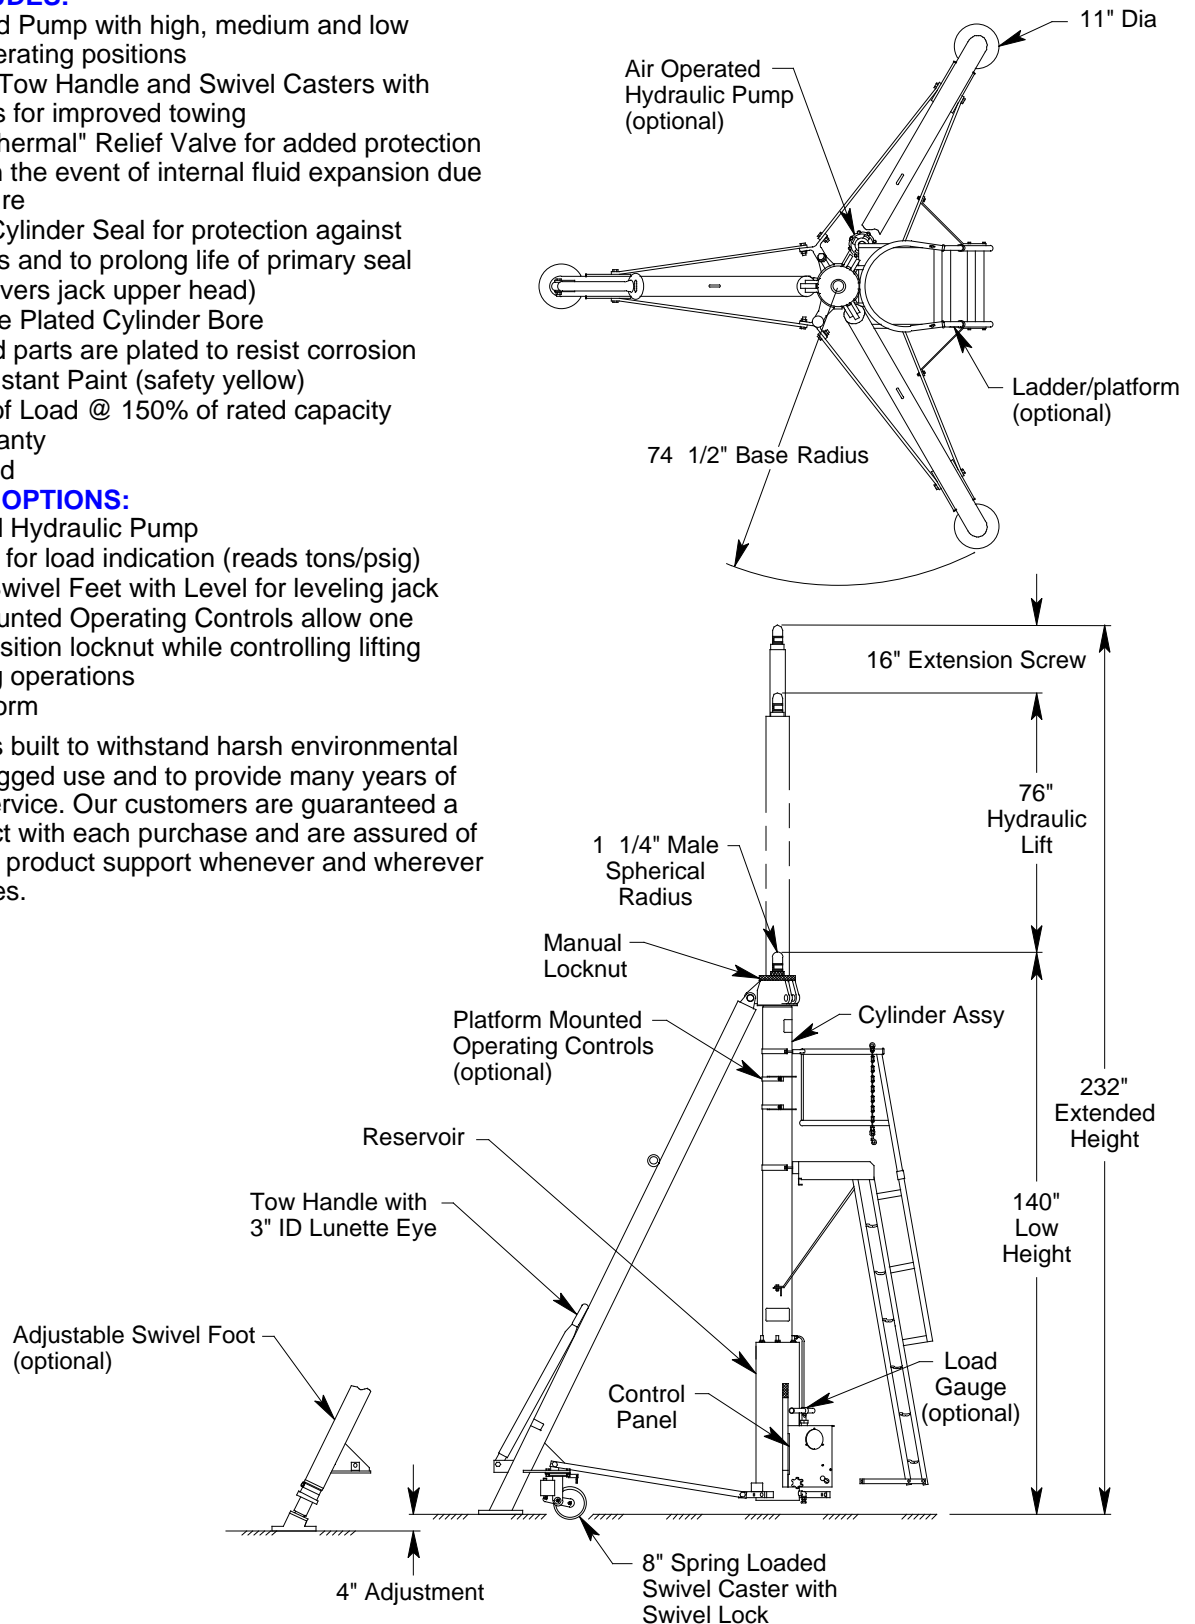

MODEL 8850

40 TON FIXED HEIGHT TRIPOD JACK

SPECIFICATIONS

Rated Capacity: 40 tons (36.3 m. tons)
 Side Load: 15% of vertical load
 Roll Under Height: 141.5 inches (3594 mm)
 Low Height: 140 inches (3556 mm)
 Hydraulic Lift: 76 inches (1930 mm)
 Extension Screw: 16 inches (406 mm)
 Total Extended Height: 232 inches (5893 mm)
 Oil Pressure at Rated Capacity: 2600 psig (183 kg/sq cm)
 Safety Pop-off Valves
 System Relief Valve set at: 44 tons (39.9 m. tons)
 Thermal Relief Valve set at: 50 tons (45.4 m. tons)
 Proof Load: 60 tons (54.4 m. tons)
 Reservoir Capacity: 12.6 gallons (42.8 liters)
 Hydraulic Fluid: MIL-H-5606 or equivalent
 Maximum Towing Speed: 5 mph (8 km/h)
 Approximate Jack Net Weight: 2450 lbs (1111 kg)

MODEL 8850 TYPICAL AIRCRAFT APPLICATIONS

Wing	Aft Fuselage
C130*	A300, A310*, B767-200 thru -400
*Specify 3/4" Female Spherical Radius Ship Adapter p/n 73318-1 for this application	

OPTIONAL EQUIPMENT CODES: (Specify at time of order)

AP: Air Operated Hydraulic Pump
 GA: Load Gauge
 AF: Adjustable Swivel Foot
 LA: Ladder/platform
 RC: Platform Mounted Operating Controls
 SPC: Special Paint Color (yellow is standard)
 8850PK: Repair Kit
 73318-1: 3/4" Female Spherical Radius Ship Adapter

PACKAGING CODES & OPTIONS: (Specify at time of order)

KD: Domestic Skid - Jack Knocked Down
 ECKD: Export Crate - Jack Knocked Down (Additional Cost)

SHIPPING DATA

NOTE: Unless otherwise specified, Model 8850 jack is shipped on a wood skid in the knocked down condition. Refer to Malabar Tripod Jack Shipping Supplement for additional packaging information.

Packaging Code	Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
KD	149 (3785)	40 (1016)	56 (1422)	2700 (1225)
ECKD	151 (3835)	45 (1143)	59 (1499)	3100 (1406)