

MODEL 8784B EZ LOAD™ SERVICE TRAILER

EZ LOAD™ TRAILER INCLUDES:


- Self Contained Lift System to raise and lower trailer bed for easy load and unload operations. Lift system utilizes an on-board nitrogen bottle (2400 psig or 3600 psig) and pneumatic lift actuators
- Conveniently located Control Panel with system pressure gauges (to monitor system operation) and safety relief valve
- Single Valve Control located on control panel raises, lowers or maintains position of trailer bed
- High capacity 6.00 x 9 (21 inch diameter) Poly Filled Tires eliminate flats due to punctures and provide a cushioned ride
- 12 inch x 11 inch x 57 inch long Storage Box for landing gear hand tools
- Aircraft tire Restraint Chains and equipment Tie Down Straps and Padeyes
- Auxiliary Tow Pintle
- Heavy duty tubular steel construction with bar grating to reduce slipping on trailer bed surface

- Rugged large diameter tubular steel Tow Handle with integral adjustable Parking Brake and 3 inch lunette eye
- All unpainted parts are plated to resist corrosion
- Skydrol Resistant Paint (safety yellow)
- Shipping Skid

STANDARD OPTIONS:

- Two extra Tow Pintles
- Cover for control panel
- Side Chains for jack compartments
- Aircraft Tire Service Regulator and Hose Assembly
- US DOT Standard 3600 psig Nitrogen Bottle
- Special Paint Color

Model 8784B is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

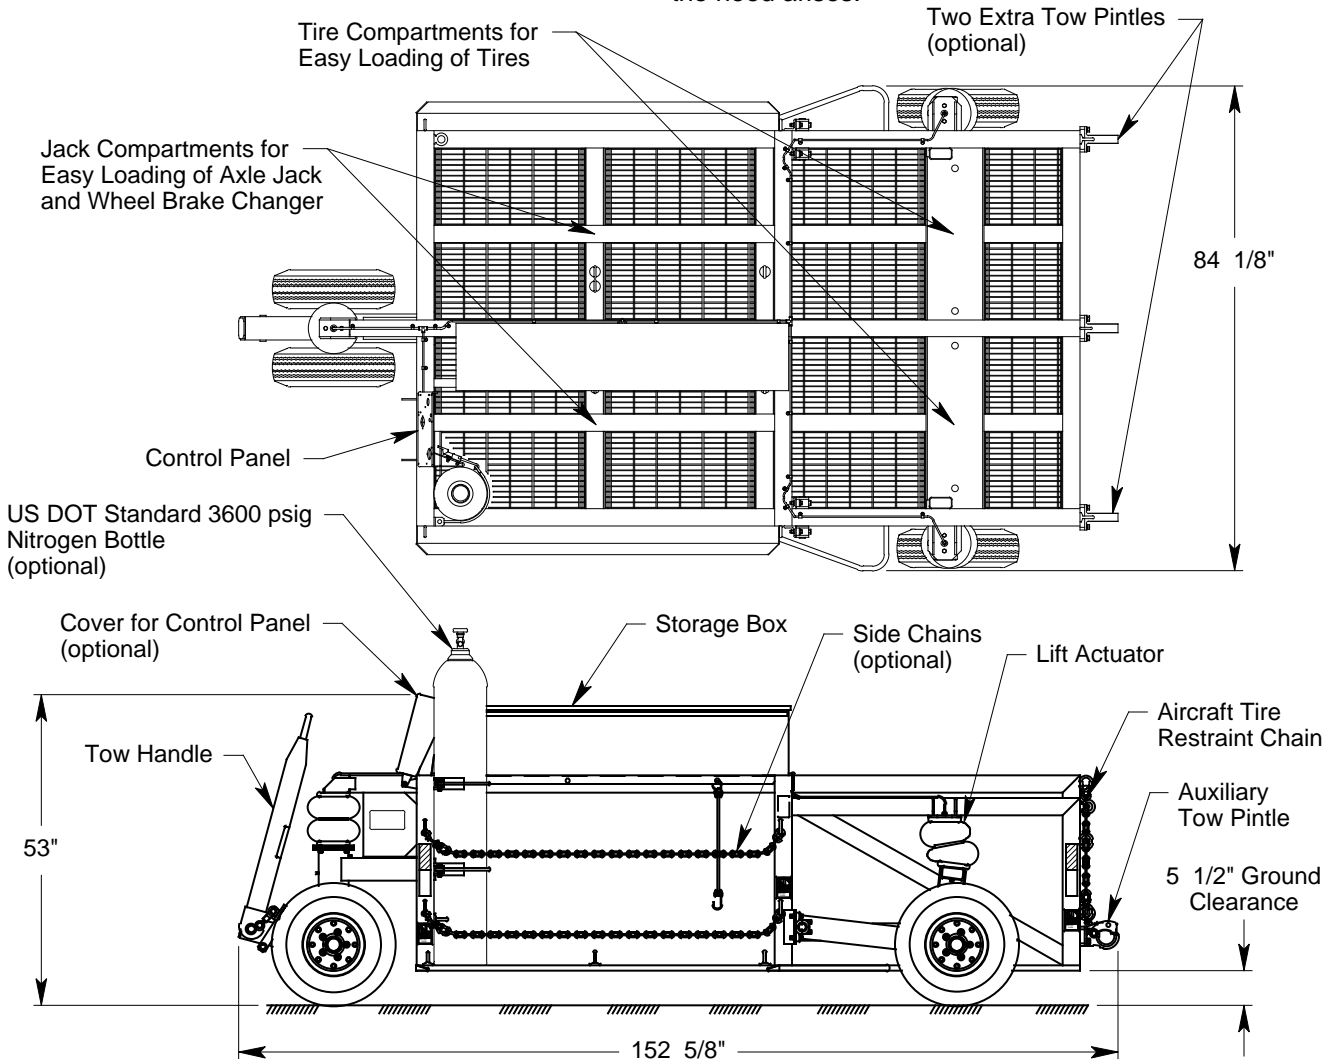


See Reverse Side for Specifications, Options & Shipping Data

MODEL 8784B EZ LOAD™ SERVICE TRAILER

SPECIFICATIONS

Maximum Aircraft Tire Size: 56 inches (1422 mm)
 Trailer Bed Raise/Lower Cycles
 2400 psig Nitrogen Bottle: 70
 3600 psig Nitrogen Bottle: 80
 Trailer Bed Lift/Lowering Speed: 15-20 seconds
 Actuator Minimum Operating Pressure: 100 psig (7 kg/sq cm)
 Auxiliary Tow Pintle Maximum Tongue Weight: 200 lbs (91 kg)
 Auxiliary Tow Pintle Maximum Tow Weight: 2000 lbs (907 kg)
 Maximum Towing Speed: 20 mph (32 km/h)
 Trailer Net Weight (empty): 1560 lbs (708 kg)
 Trailer Gross Weight (fully loaded): 3770 lbs (1710 kg)

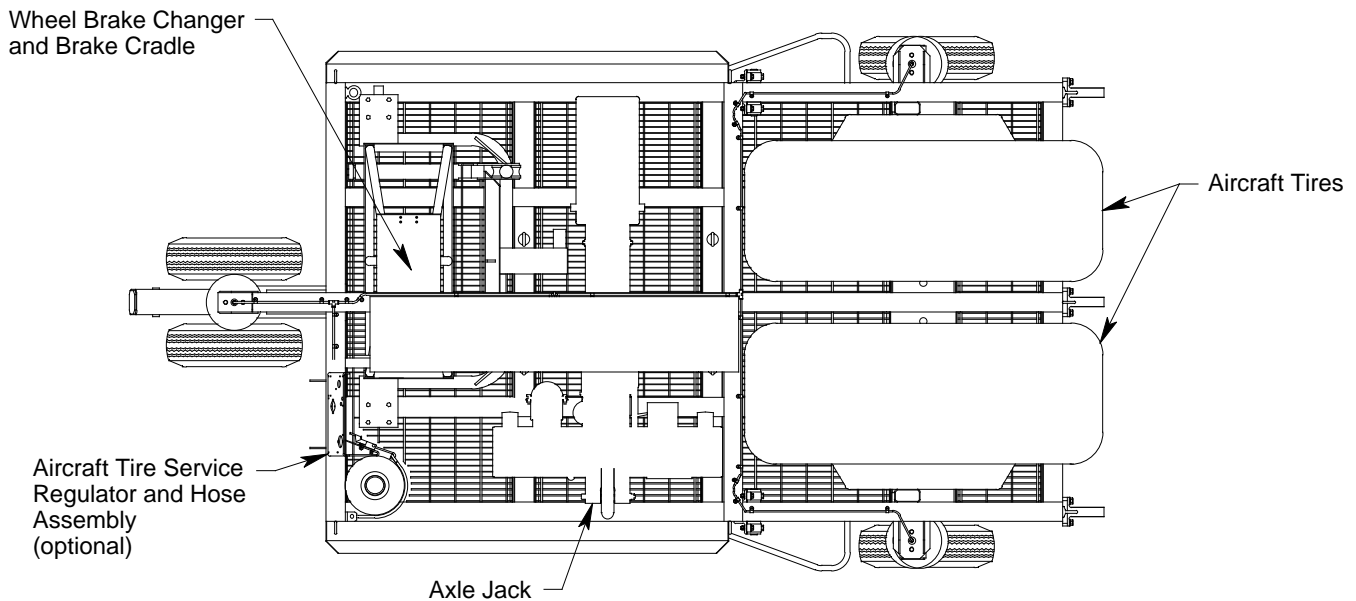

OPTIONAL EQUIPMENT CODES: (Specify at time of order)

PH: Two Extra Tow Pintles
 PC: Panel Cover
 SC: Side Chains
 TS: Aircraft Tire Service Regulator and Hose Assembly
 NB: US DOT Standard 3600 psig Nitrogen Bottle
 SPC: Special Paint Color (yellow is standard)

PACKAGING CODES & OPTIONS: (Specify at time of order)

— : Domestic Skid
 EC: Export Crate (Additional Cost)

SHIPPING DATA

NOTE: Unless otherwise specified, Model 8784B is shipped on a wood skid.

Packaging Code	Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
—	156 (3962)	85 (2159)	56 (1422)	2100 (953)
EC	158 (4013)	90 (2286)	59 (1499)	2400 (1089)

MALABAR International

Issue: 3/00

PLANT: 220 WEST LOS ANGELES AVENUE, SIMI VALLEY, CALIFORNIA 93065 • (805) 581-0116 • FAX (805) 584-1624
 MAIL: P.O. BOX 367, SIMI VALLEY, CALIFORNIA 93062 • E-mail: sales@malabar.com • Web site: http://www.malabar.com