


## MODEL 8732 20 TON AXLE JACK

### JACK INCLUDES:

- Hard Chrome Plated Cylinder and Plunger Bores
- Extension screw and hand pump parts are plated to resist corrosion
- Manual Hand Pump
- Skydrol Resistant Paint (safety yellow)
- Factory Proof Load @ 150% of rated capacity
- 1 Year Warranty
- Fully Enclosed Shipping Container

Model 8732 is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

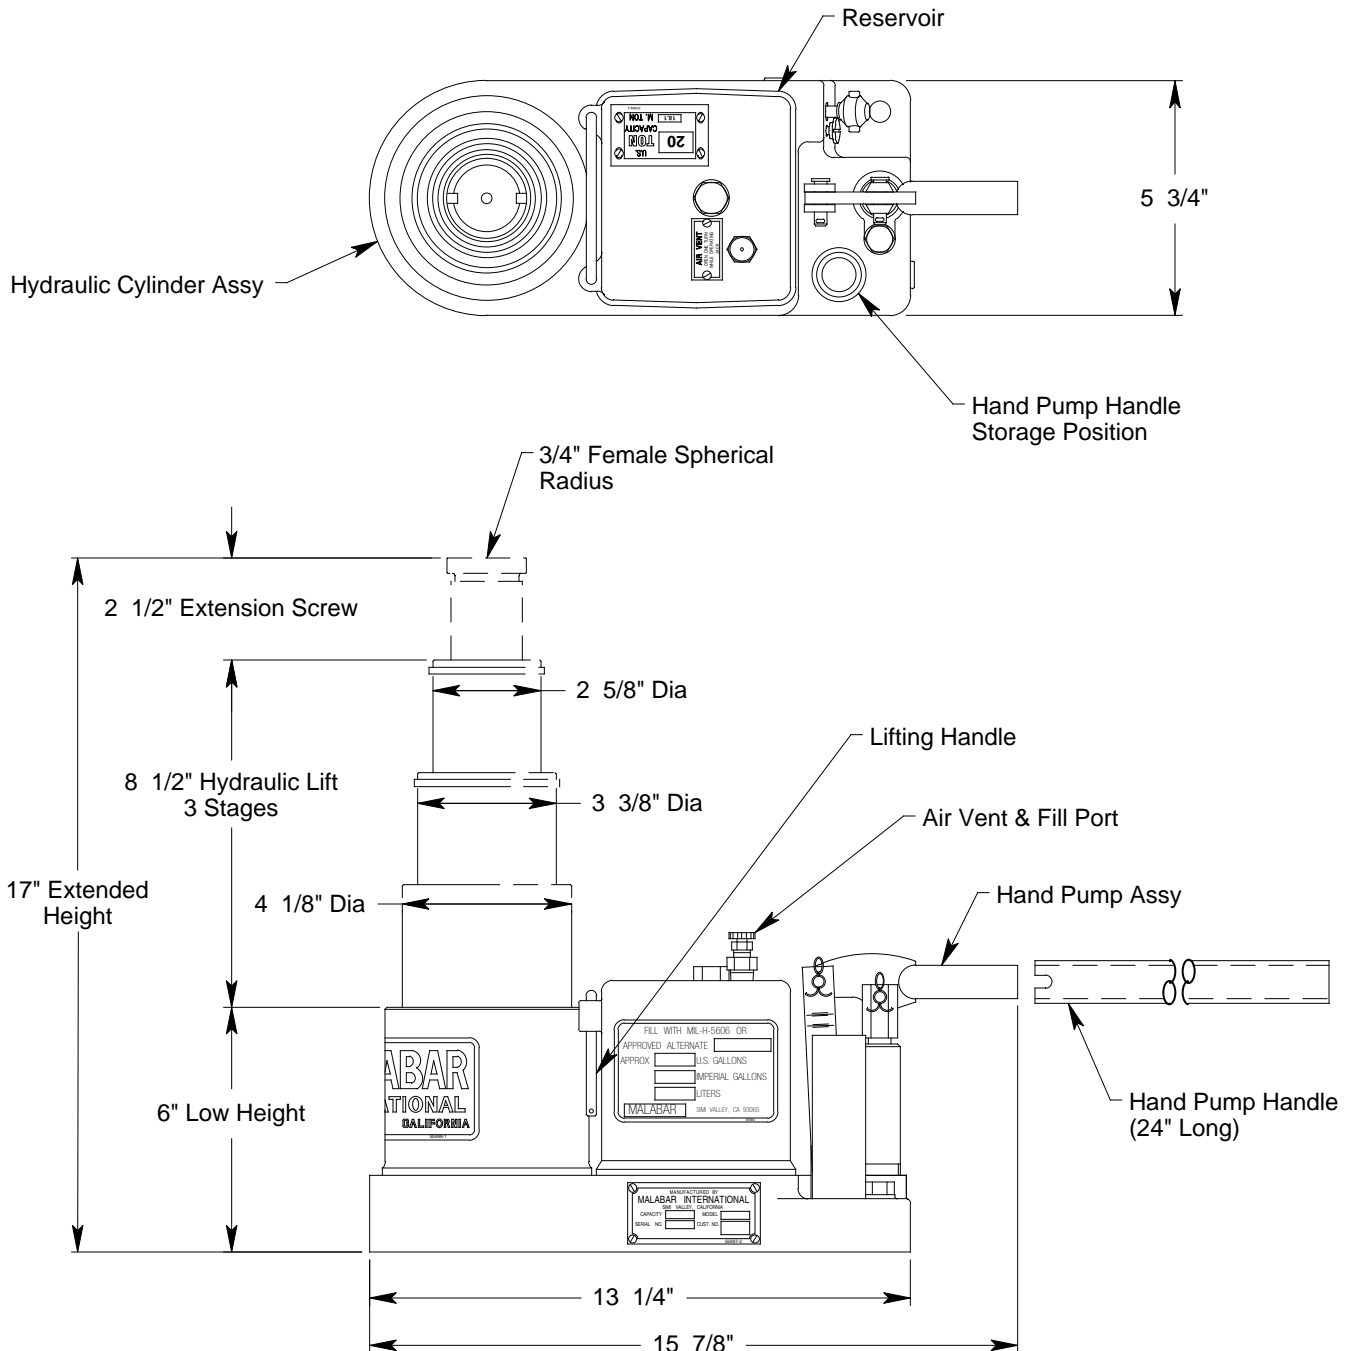

See Reverse Side for Specifications, Options, Aircraft Applications & Shipping Data

# MODEL 8732 20 TON AXLE JACK

## SPECIFICATIONS

Rated Capacity: 20 tons (18.1 m. tons)  
 Side Load: 15% of vertical load  
 Low Height: 6 inches (152 mm)  
 Hydraulic Lift: 8.5 inches (216 mm)  
 Extension Screw: 2.5 inches (64 mm)  
 Total Extended Height: 17 inches (432 mm)  
 Oil Pressure at Rated Capacity: 6270 psig (441 kg/sq cm)  
 Safety Pop-off Valve set at: 22 tons (20.0 m. tons)  
 Proof Load: 30 tons (27.2 m. tons)  
 Reservoir Capacity: 0.5 gallons (1.9 liters)  
 Hydraulic Fluid: MIL-H-5606 or equivalent  
 Approximate Jack Net Weight: 57 lbs (26 kg)

## MODEL 8732 TYPICAL AIRCRAFT APPLICATIONS

Nose Landing Gear	Main Landing Gear
A319, A320, A321, B757, DC8	A321 with dual bogey axle

### OPTIONAL EQUIPMENT CODES: (Specify at time of order)

SPC: Special Paint Color (yellow is standard)

8732PK: Repair Kit

## SHIPPING DATA

NOTE: Model 8732 jack is shipped in a fully enclosed shipping container.

Length inch (mm)	Width inch (mm)	Height inch (mm)	Weight lbs (kg)
26 (660)	9 (229)	18 (457)	78 (35)